


# 15 Discrete-Time Modulation


## Recommended Problems

### P15.1

In the system shown in Figure P15.1-1,  $x(t)$  is used to modulate an impulse train carrier. The signal  $x_p(t)$  then corresponds to an impulse train of samples of  $x(t)$ . Under appropriate conditions,  $x(t)$  can be recovered from  $x_p(t)$  with an ideal low-pass filter.


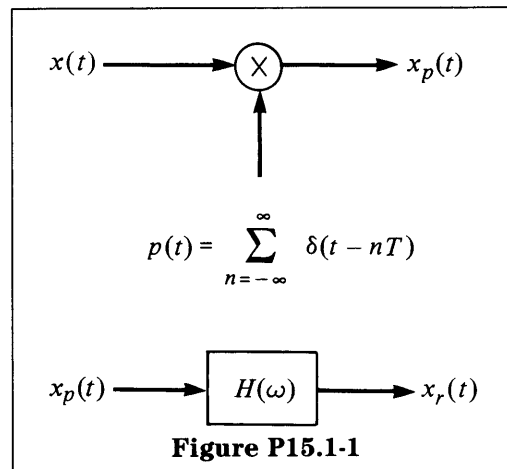


For  $X(\omega)$  and  $H(\omega)$  as indicated in Figure P15.1-2, sketch  $X_p(\omega)$  and  $X_r(\omega)$ . Indicate specifically whether in this case  $x_r(t)$  is equal to (or proportional to)  $x(t)$ .

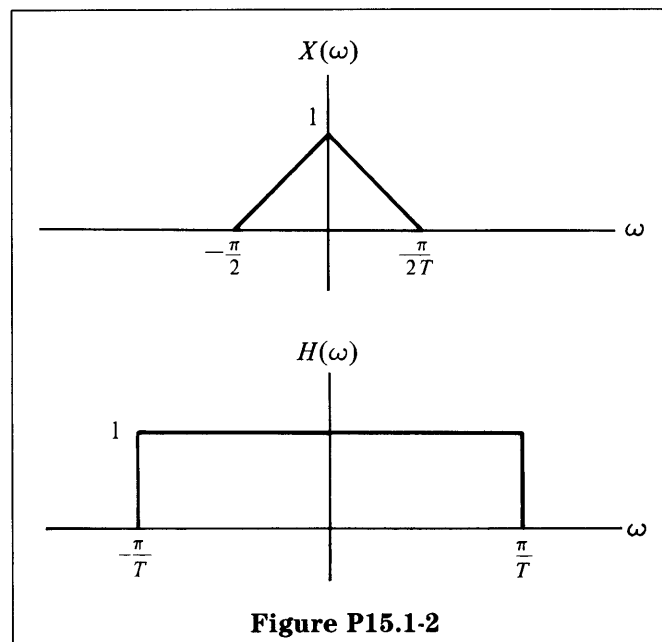


**P15.2**

Consider the discrete-time modulation system in Figure P15.2-1. Let  $X(\Omega)$  be given as in Figure P15.2-2. Sketch  $Y(\Omega)$  for  $\Omega_0 = \pi/2$  and for  $\Omega_0 = \pi/4$ .

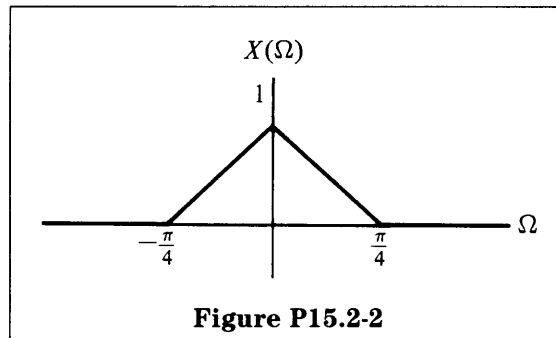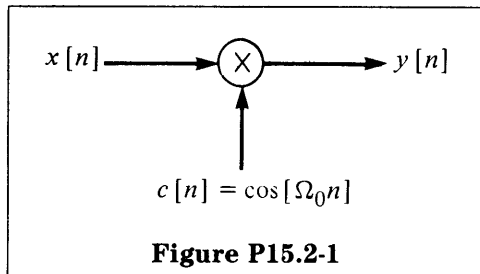

**P15.3**

The system in Figure P15.3 is equivalent to a linear, time-invariant system with frequency response  $G(\Omega)$ . Determine and sketch  $G(\Omega)$ .

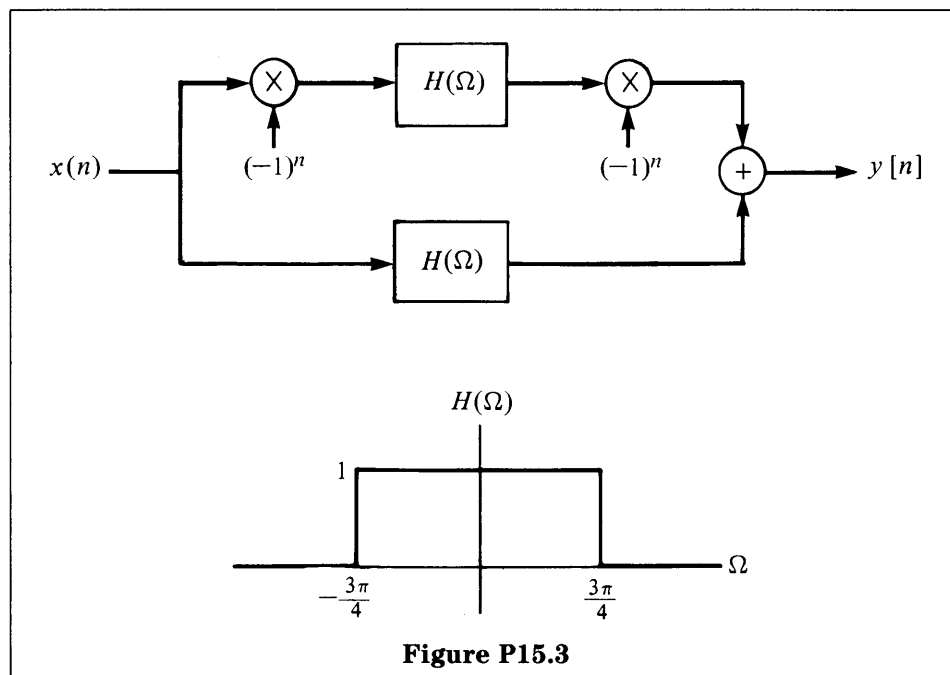

**P15.4**

A discrete-time pulse amplitude modulation system is shown in Figure P15.4, where  $p[n]$  and  $X(\Omega)$  are as indicated.

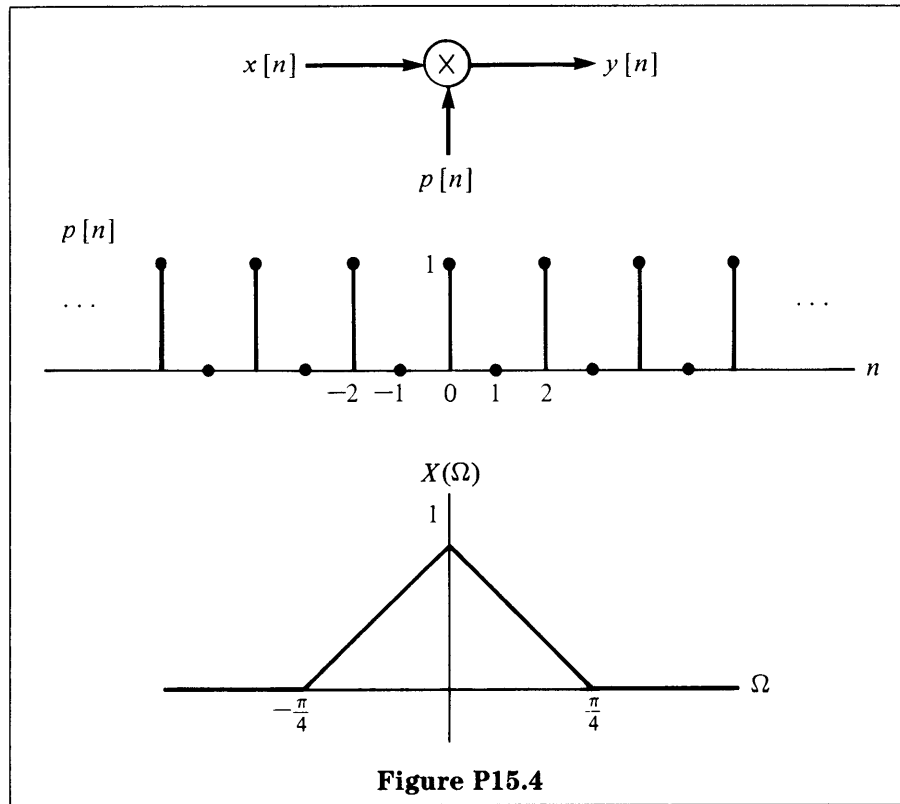


Figure P15.4

- (a) Sketch  $P(\Omega)$  and  $Y(\Omega)$ .
- (b) Describe a system to recover  $x[n]$  from  $y[n]$ .
- (c) Discuss how this system could be used to time-division-multiplex two signals  $x_1[n]$  and  $x_2[n]$ .

**P15.5**

In the system in Figure P15.5,  $s(t)$  is a rectangular pulse train as indicated.

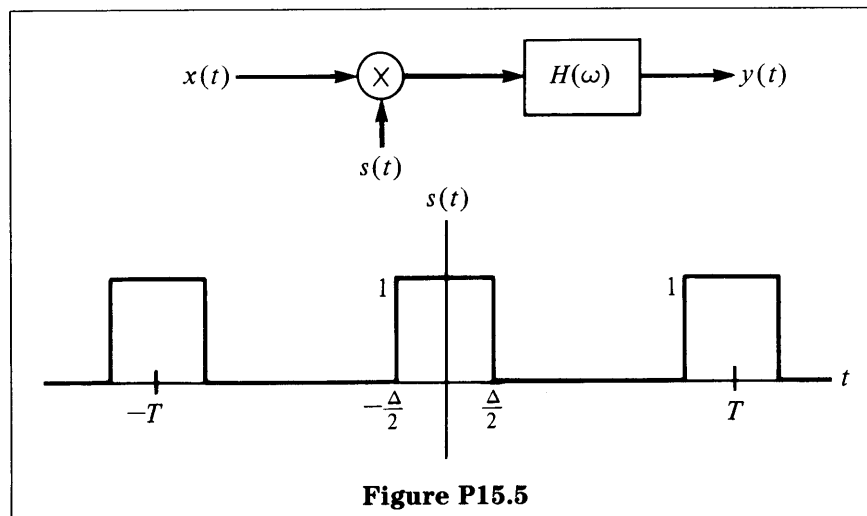



Figure P15.5

Determine  $H(\omega)$  so that  $y(t) = x(t)$ , assuming that no aliasing has occurred.

## Optional Problems

### P15.6

Consider the discrete-time system shown in Figure P15.6. The input sequence  $x[n]$  is multiplied by  $\phi_1[n]$ , and the product is taken as the input to an LTI system. The final output  $y[n]$  is then obtained as the product of the output of the LTI system multiplied by  $\phi_2[n]$ .

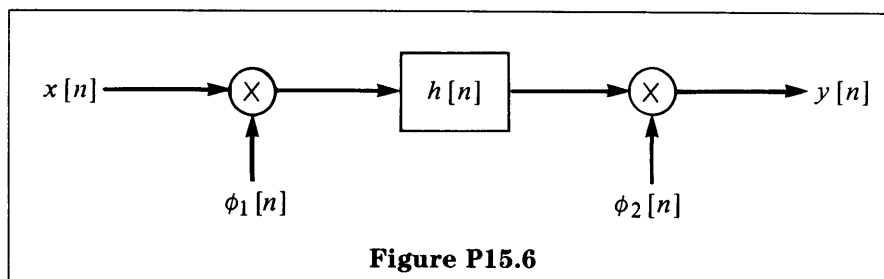

- (a) In general, is the overall system linear? Is it time-invariant? (Consider, for example,  $\phi_1 = \delta[n]$ ).
- (b) If  $\phi_1[n] = z^{-n}$  and  $\phi_2[n] = z^n$ , where  $z$  is any complex number, show that the overall system is time-invariant.


### P15.7

In the system in Figure P15.7, two time functions  $x_1(t)$  and  $x_2(t)$  are multiplied, and the product  $w(t)$  is sampled by a periodic impulse train.  $x_1(t)$  is bandlimited to  $\omega_1$ , and  $x_2(t)$  is bandlimited to  $\omega_2$ :

$$X_1(\omega) = 0, \quad |\omega| > \omega_1,$$

$$X_2(\omega) = 0, \quad |\omega| > \omega_2$$


Determine the *maximum* sampling interval  $T$  such that  $w(t)$  is recoverable from  $w_p(t)$  through the use of an ideal lowpass filter.

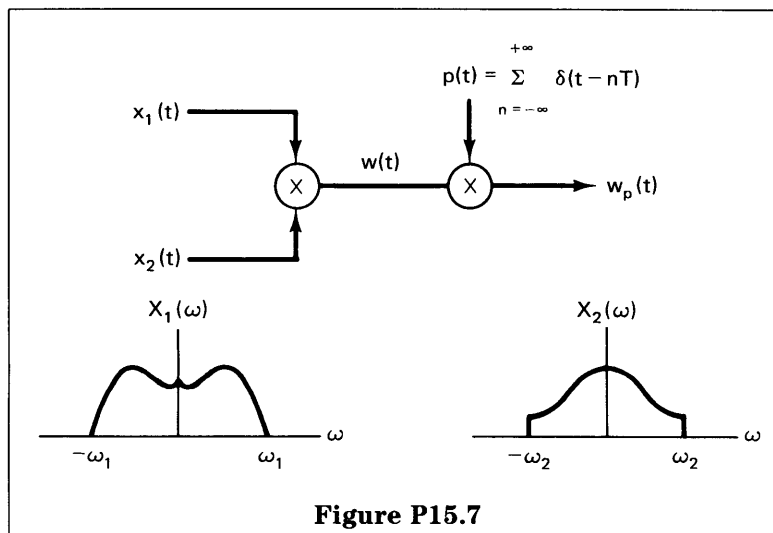


**P15.8**

A discrete-time filter bank is to be implemented by using a basic lowpass filter and appropriate complex exponential amplitude modulation as indicated in Figure P15.8-1.

- (a) With  $H(\Omega)$  an ideal lowpass filter, as shown in Figure P15.8-2, the  $i$ th channel of the filter bank is to be equivalent to a bandpass filter with frequency response shown in Figure P15.8-2. Determine the values of  $\alpha_i$  and  $\beta_i$  to accomplish this.

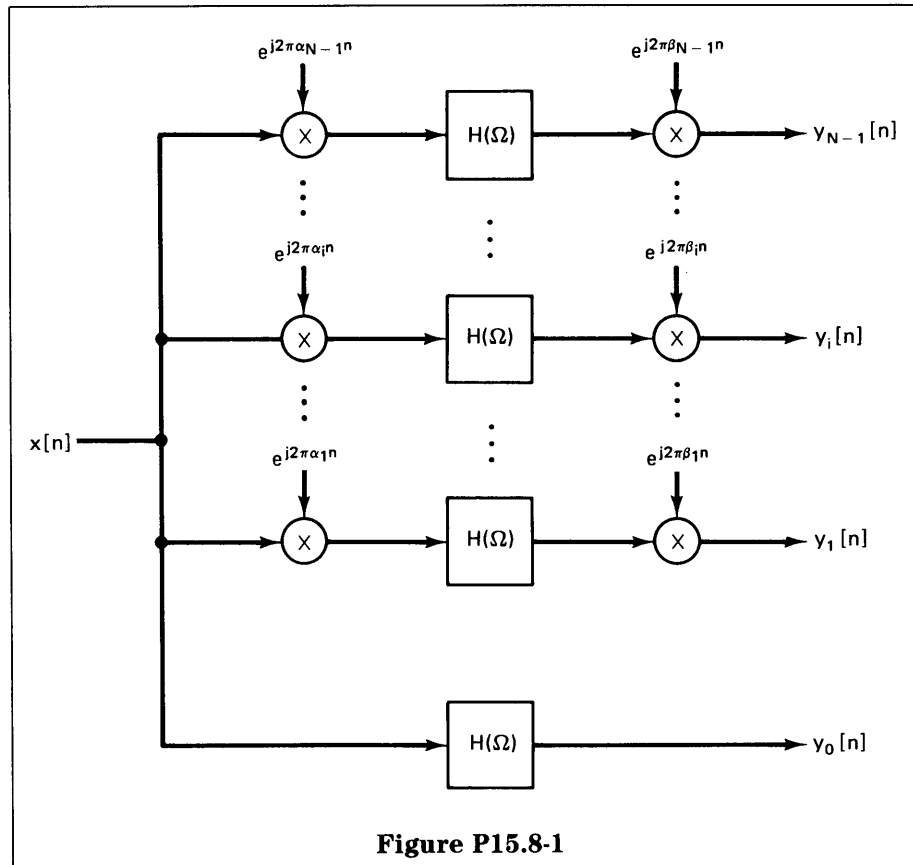


- (b) Again with  $H(\Omega)$  as in Figure P15.8-2 and with  $\Omega_i = 2\pi i/N$ , determine the value of  $\Omega_0$  in terms of  $N$  so that the filter bank covers the entire frequency band without any overlap.

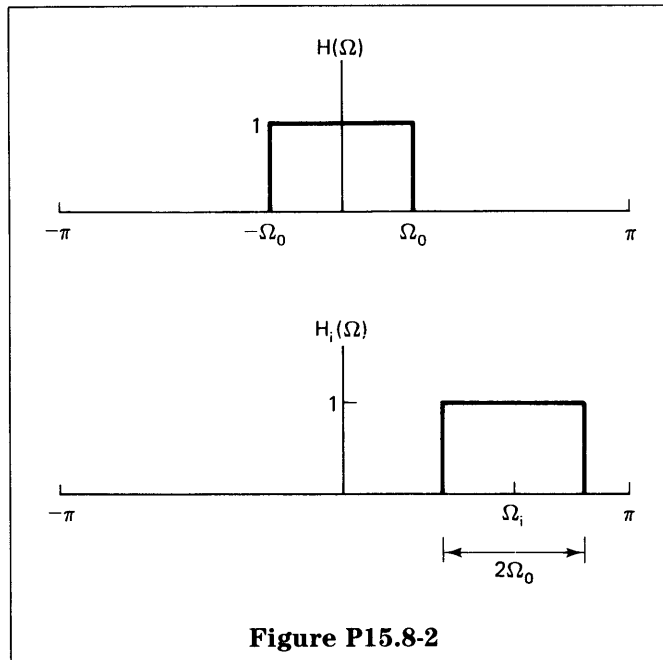

**P15.9**

Consider the modulation system in Figure P15.9.

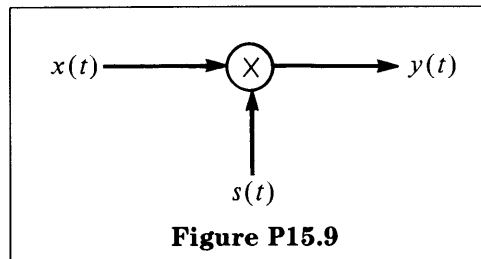


Suppose we know that  $X(\omega)$  is bandlimited to  $\pm\omega_c$  and that  $s(t)$  is an *arbitrary* periodic function with period  $T$ .


- (a) Draw a possible Fourier transform of  $s(t)$ . Consider the case when  $S(\omega)|_{\omega=0}$  is zero and the case when it is not zero.
- (b) What is the range of  $T$  such that  $Y(\omega)$  will have regions equal to zero?
- (c) For a typical value of  $T$  found in part (b), determine how to recover  $x(t)$  from  $y(t)$ .

**P15.10**

Consider the modulation system in Figure P15.10-1.

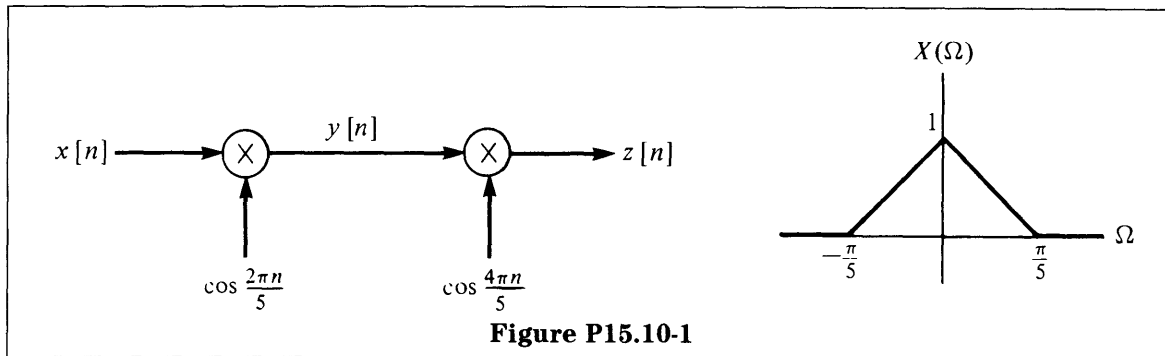

- (a) Sketch  $Y(\Omega)$ .
- (b) Sketch  $Z(\Omega)$ .
- (c) Suppose that we want to recover  $x[n]$  from  $z[n]$  using the system in Figure P15.10-2.

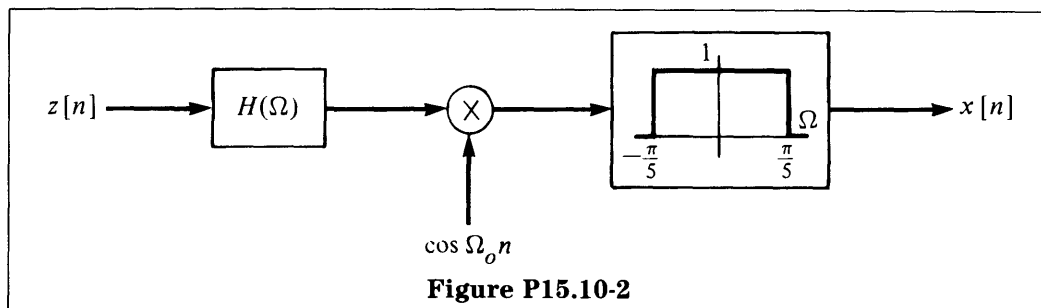

Determine two distinct combinations of  $H(\Omega)$  and  $\Omega_0$  that will recover  $x[n]$  from  $z[n]$ .